

FLEXHEAD® NEW MULTI-POSITION TALL BRACKET



FLEXHEAD®
INDUSTRIES

A PART OF **Atkore**
INTERNATIONAL

MULTI-POSITION TALL BRACKET

The Multi-Position Tall Bracket (MPT) offers a versatile design saving you both time and money!

Visit flexhead.com for more information.



Patent Pending


THE MPT FEATURES AND BENEFITS

- **No Touch** superior height allows the "MPT" to be mounted without pre-installing the ceiling tile and comes out of the box fully assembled at 24"
- **Collapsible Design** within seconds the MPT Bracket can be adjusted from **24" to 16" to 14 ½"** in length accommodating numerous applications without additional fabrication
- **No loose parts** as pre-installed mounting screws quickly secure the bracket to the ceiling T bar
- **Adjustable Open Hub** allows for swift & accurate repositioning at the 1/4 points
- **Stable** 3.5" offset bracket legs provide sprinkler head position at true center of tile while mounting bracket remains secure in its intended place



MULTI-POSITION TALL BRACKET HOSE SPECIFICATION SHEET

HOSE SPECIFICATION SHEET

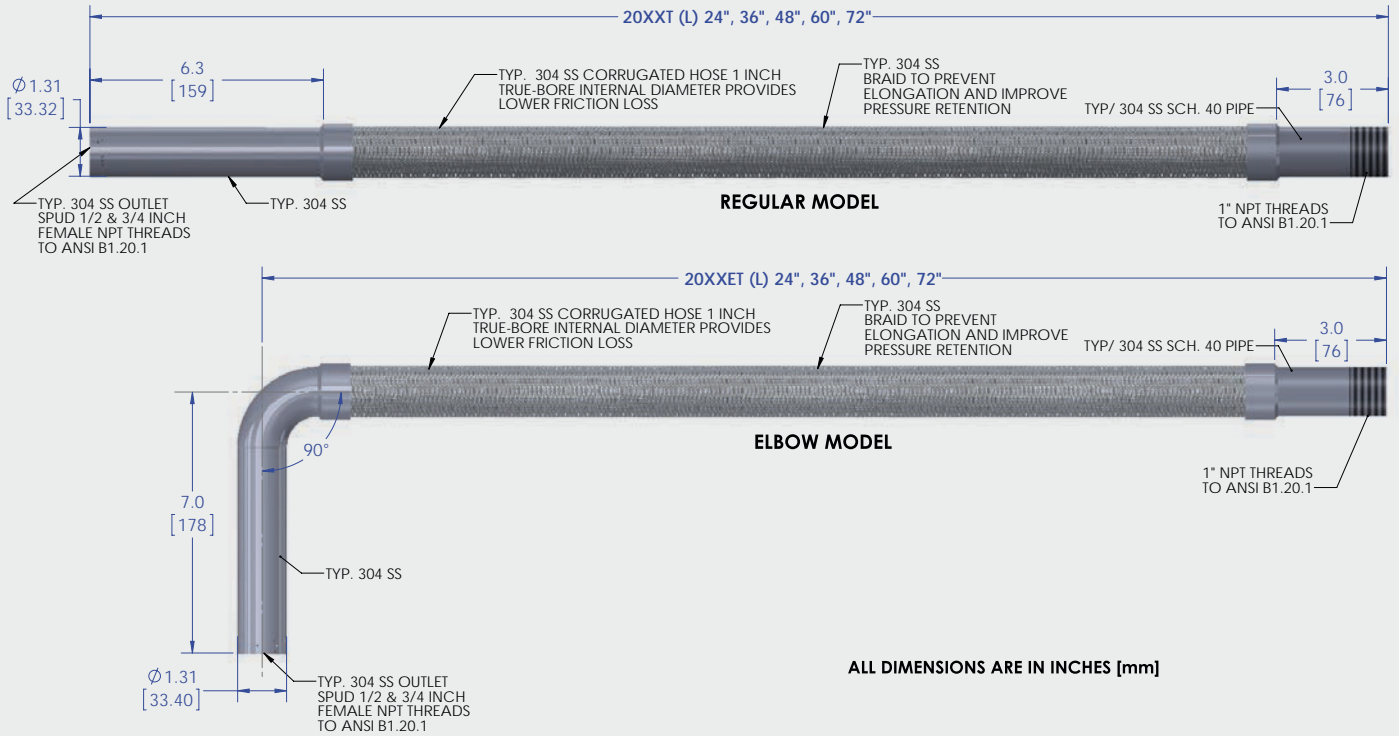

MULTI-POSITION TALL BRACKET

FlexHead	Outlet Size	Hose Assembly Length	Maximum Number of 90-Degree Bends		Maximum Equivalent Length of Schedule 40, Nominal 1 in Diameter Pipe		Maximum Ambient Temperature Rating	Maximum Rated Pressure	Maximum K-factor
			8 in - FM	3 in - UL	FM	UL			
Model #	in (cm)	Ft (m)	FM	UL	T / ET (Straight/Elbow)	T (Straight)	F (C)	PSI (KPA)	
2024T / 2024ET	1/2 (1.27)	2 (0.6)	1	3	18.4 / 26.4	11	300° (148°)	175 (1205) 300 (2068)	5.6
2036T / 2036ET		3 (0.9)	2	3	26.6 / 30.1	16			
2048T / 2048ET		4 (1.2)	3	4	30.3 / 33.8	24			
2060T / 2060ET		5 (1.5)	4	4	35.8 / 37.5	29			
2072T / 2072ET		6 (1.8)	4	4	45.6 / 41.2	35			
Model #	in (cm)	Ft (m)	FM	UL	T / ET (Straight/Elbow)	T (Straight)	F (C)	STD H-Series	
2024T / 2024ET	3/4 (1.90)	2 (0.6)	1	3	14.7 / 14.7	12	300° (148°)	175 (1205) 300 (2068)	14
2036T / 2036ET		3 (0.9)	2	3	21.8 / 21.8	18			
2048T / 2048ET		4 (1.2)	3	4	29.0 / 29.0	23			
2060T / 2060ET		5 (1.5)	4	4	36.1 / 36.1	29			
2072T / 2072ET		6 (1.8)	4	4	43.2 / 43.2	32			